


# PORTABLE LUMINAIRE / LIGHT

## PRODUCT DATASHEET

### PRODUCT DESCRIPTION


When it comes to lighting a large area, this product is the ideal solution for high impact lighting of mine-haul road intersections, road works, construction sites, events and general industrial and maintenance programs.

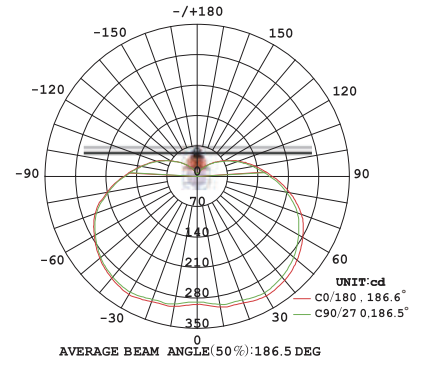

\* L=2.4m / 9.4m.

### SPECIFICATION/FEATURES

- » Input voltage: 220V/50Hz
- » Wattage: 20W±10%
- » THD: <20%
- » Colour handle: Orange
- » Lamp cover: opal
- » Protective net cover
- » 115LM/W in a Luminaire
- » Outdoor use waterproof design: Ip65 Impact
- » UL Vo 850°C
- » protection: IK08
- » Reliable lifespan: >50,000 hours
- » 3 year limited warranty
- » Wire Range: H07RN-F, 2\*1.5mm<sup>2</sup>, 450V/750V



Single lamp Parameter	
	High Volt
AC Input	220V ac 50Hz
Wattage	20W±10%
LED Qty	72 PCS SMD2835
Lumen±5%	2,300 lm
PF	≥0.9
THD	<20%
CRI	≥80
CCT.	2700-6500K
Dimensions	ø120*188mm ø4.72"x7.40"

### TECHNICAL SPECIFICATIONS

Model No.	Length	Wattage (W)±/ - 10%	AC Input	Lumens +/- 5%	CCT.	PF	Dimensions H*D (Single)	Group	Certificate
03KSLxx	2.4m	20WxN	220V ac/50Hz	2,300xN	2700-6500K	≥0.9	188.00*120.00(mm)	N pcs	CE
10KSLxx	9.4m	20WxN	220V ac/50Hz	2,300xN	2700-6500K	≥0.9	7.40"x4.72"	N pcs	CE

### OPTIONAL MATERIAL

Model No.	Description
① PCSL20F	Power Cable 220VAC for String Light 20W with Female connector
② SL20MFX	String Light 20W with Male/Female connectors.
③ 03SL20MF	Connecting cable 2.40m for String Light 20W SL20 with Male/Female connectors.
④ 10SL20MF	Connecting cable 9.40m for String Light 20W SL20 with Male/Female connectors.

\* xx means quantity 01-99

\* x denotes the color temperature(CCT) of LED, (e.g.3=2700K,5=5000K,6=6500K)

\* 20W\*N-N pcs 20W lamp. N is expressed as quantity.The quantity range 1-99pcs.

